


# Cell Type UR16650ZTA(2380mAh)

## Specifications

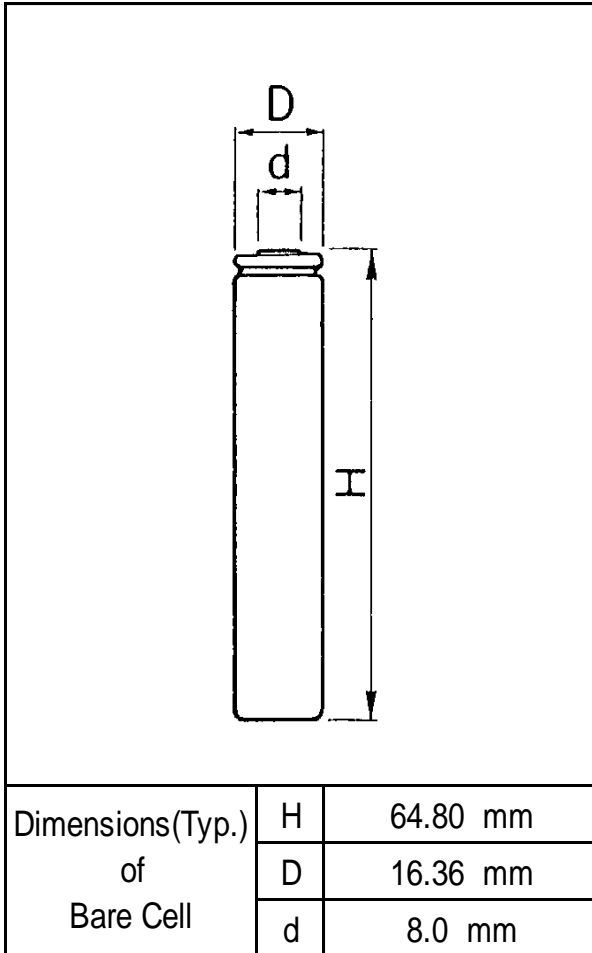


Rated Capacity (at 20°C)		2330mAh
Capacity (at 25°C)		Min.2380mAh
		Typ.2500mAh
Nominal Voltage		3.7V
Charging Method		Constant Current -Constant Voltage
Charging Voltage		4.35V
Charging Current		Std. 1190mA
Charging Time		4.0hrs.
Ambient Temperature	Charge	0~+45°C
	Discharge	-20~+60°C
	Storage	-20~+50°C
Weight (Max.)		40.5g
Dimensions (Max.) * without tube	(D)	16.39mm
	(H)	64.90mm
Volumetric Energy Density		630Wh/l
Gravimetric Energy Density		213Wh/kg


Discharged State after Assembling

\*When designing a battery pack, get the precise information on a cell battery drawing

# Discharge Rate Characteristics for UR16650ZTA

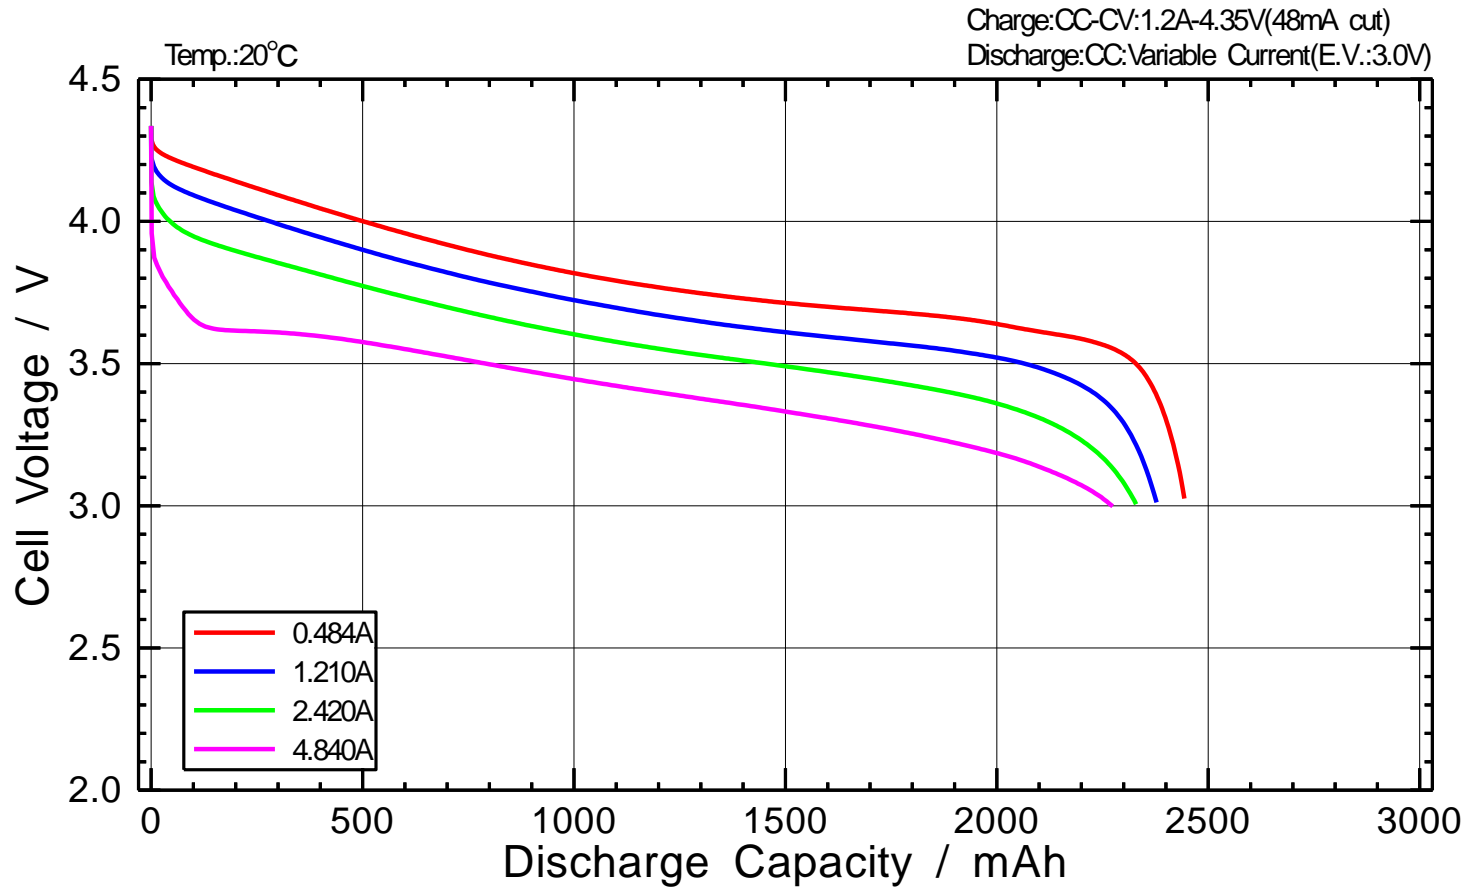

# Discharge Temperature Characteristics for UR16650ZTA

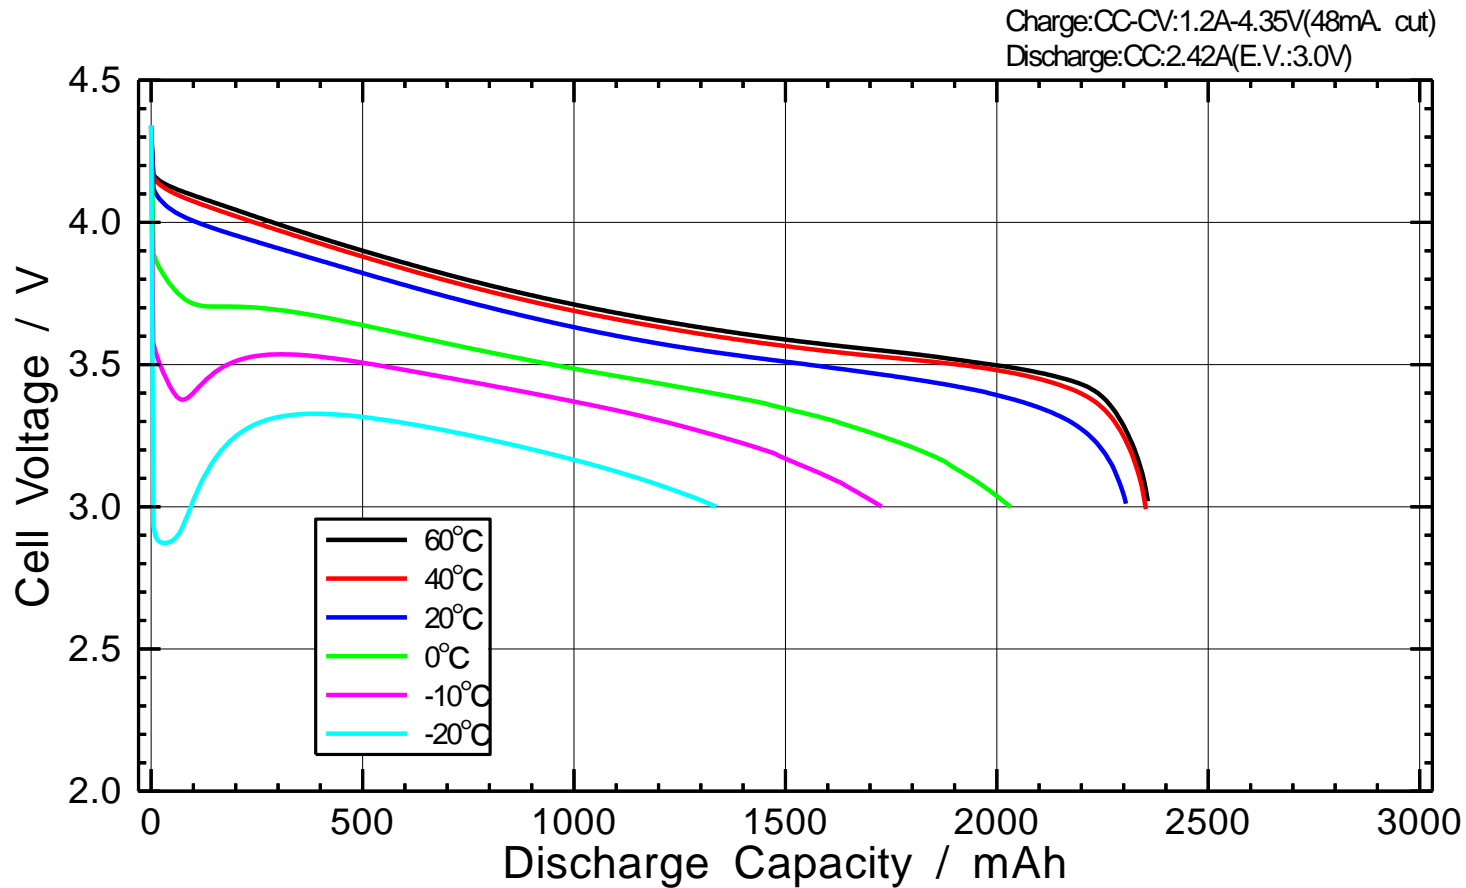

# Charge Characteristics for UR16650ZTA

